

PacNOG 2

ccTLD Workshop Samoa:
Unix System Administration

Welcome!

- Who are we?
- Timetable and administrivia
- Objectives for the week
 - Learn your way around Unix/FreeBSD
 - TCP/IP network-based services
 - Security
 - Upgrading and maintenance

This is YOUR workshop!

- Stop us if we're speaking too fast
- Stop us if you don't understand anything
- Ask lots of questions!


Why use UNIX?

- Scalability and reliability
 - has been around for many years
 - works well under heavy load
- Flexibility
 - emphasises small, interchangeable components
- Manageability
 - remote logins rather than GUI
 - scripting
- Security
 - Windows has a long and sad security history
 - Unix and its applications are not blameless though

Windows DOES NOT SCALE

- OK for 100 mailboxes
- But don't try to run 10,000 mailboxes with standard Microsoft solutions
- Remote administration is painful
 - It's *still* a desktop OS
 - Lots of administrative overhead
- Spend your entire life installing patches?
- Not as stable
- Commercial pricing but lousy support
- Closed source commercial software is not necessarily a bad thing

Simplified Unix family tree (Look at the wall... :-))



Why did we choose FreeBSD?

- It's Free!
- Optimised for performance on i386 hardware
 - NetBSD aims to run on many platforms
 - OpenBSD aims to provide enhanced security
- Well proven in real-world environments
- Excellent packaging system
- Industrial strength TCP/IP stack

Why not Linux?

- Lack of centralized documentation
- Lack of tools for performance analysis (*gstat*)
- Too many distributions to choose from
 - Ubuntu, Gentoo (Debian - not bad)
 - SCO, Turbolinux, Mandriva, SuSE, etc.
- Red Hat used to be the *de-facto* choice for a reliable, free distribution
 - Now it has gone commercial (RHES)
 - Mandriva
 - Fedora is "bleeding edge" and has short lifecycle
- Package management is a problem
 - rpm, source, apt is better

Why not Linux cont.

- BSD includes the kernel *and* the userland utilities in a single source tree
- BSD tends to be more "conservative" (except for debian)
 - emphasises stability and compatibility
 - compare: iptw, ipfwadm, ipchains, iptables...
- Excellent TCP/IP stack
 - Ask Microsoft, they used it for Windows 2000
- FreeBSD packaging system allows for flexibility
 - Packages (pkg) tend to be more conservative
 - Ports are more generally more current

Is free software really any good?!

- The people who write it also use it
- Source code is visible to all
 - The quality of their work reflects on the author personally
 - Others can spot errors and make improvements
- What about support?
 - documentation can be good, or not so good
 - mailing lists; search the archives first
 - if you show you've invested time in trying to solve a problem, others will likely help you
 - <http://www.catb.org/~esr/faqs/smart-questions.html>

Is free software really any good?


- Core Internet services run on free software
 - BIND Domain Name Server
 - Apache web server (secure SSL as well)
 - Sendmail, Postfix, Exim for SMTP/POP/IMAP
 - MySQL and PostgreSQL databases
 - PHP, PERL, C languages
- Several very high profile end-user projects
 - Firefox, original Netscape browser
 - OpenOffice
 - Thunderbird

First topics:

- Unix birds-eye overview
- Partitioning
- FreeBSD installation

Key components of the Unix OS

- Kernel
- Shell
- User processes
- System processes
- Inter-process communication
- Security model
- Filesystem layout

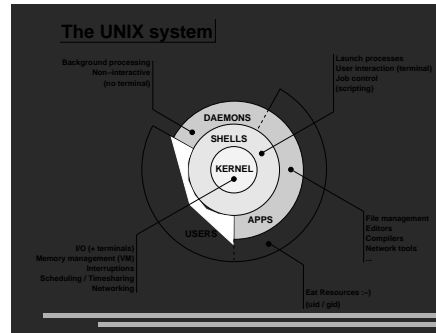

Kernel

- The "core" of the operating system
- Device drivers
 - communicate with your hardware
 - block devices, character devices, network devices, pseudo devices
- Filesystems
 - organise block devices into files and directories
- Memory management
- Timeslicing (multiprocessing)
- Networking stacks - esp. TCP/IP
- Enforces security model

Shell

- Command line interface for executing programs
 - DOS/Windows equivalent: `command.com` or `command.exe`
- Choice of similar but slightly different shells
 - `sh`: the "Bourne Shell". Standardised in POSIX
 - `csh`: the "C Shell". Not standard but includes command history
 - `bash`: the "Bourne-Again Shell". Combines POSIX standard with command history. But distributed under GPL (more restrictive than BSD licence)

User processes

- The programs that you choose to run
- Frequently-used programs tend to have short cryptic names
 - `ls` = list files
 - `cp` = copy file
 - `rm` = remove (delete) file
- Lots of stuff included in the base system
 - editors, compilers, system admin tools
- Lots more stuff available to install too
 - packages / ports

System processes

- Programs that run in the background; also known as "daemons"
- Examples:
 - `cron`: executes programs at certain times of day
 - `syslogd`: takes log messages and writes them to files
 - `inetd`: accepts incoming TCP/IP connections and starts programs for each one
 - `sshd`: accepts incoming logins
 - `sendmail` (other MTA daemon): accepts incoming mail

Inter-process communication

- Pipes: easy to use!
 - `grep hostname /etc/* | less`
- Other, more specialised mechanisms
 - `fifo`s (named pipes)
 - sockets
 - System V IPC and shared memory

I.E. through the filesystem or over the network

Security model

- Numeric IDs
 - user id (uid 0 = "root", the superuser)
 - group id
 - supplementary groups
- Mapped to names
 - `/etc/passwd`, `/etc/group` (plain text files)
 - `/etc/pwd.db` (fast indexed database)
- Suitable security rules enforced
 - e.g. you cannot kill a process running as a different user, unless you are "root"

Filesystem security

- Each file and directory has three sets of permissions
 - For the file's uid (user)
 - For the file's gid (group)
 - For everyone else (other)
- Each set of permissions has three bits: `rwX`
 - File: `r`=read, `w`=write, `x`=execute
 - Directory: `r`=list directory contents, `w`=create/delete files within this directory, `x`=enter directory
- Example: `brian wheel rwxr-x---`

Key differences to Windows

- Unix commands and filenames are CASE-SENSITIVE
- Path separator: `/` for Unix, `\` for Windows
- Windows exposes a separate filesystem tree for each device
 - `A:\foo.txt`, `C:\bar.txt`, `E:\baz.txt`
 - device letters may change, and limited to 26
- Unix has a single "virtual filesystem" tree
 - `/bar.txt`, `/mnt/loppy/foo.txt`, `/cdrom/baz.txt`
 - administrator chooses where each FS is attached

Standard filesystem layout

<code>/bin</code>	essential binaries
<code>/boot</code>	kernel and modules
<code>/dev</code>	device access nodes
<code>/etc</code>	configuration data
<code>/etc/defaults</code>	configuration defaults
<code>/etc/rc.d</code>	startup scripts
<code>/home/username</code>	user's data storage
<code>/lib</code>	essential libraries
<code>/sbin</code>	essential sysadmin tools
<code>/stand</code>	recovery tools
<code>/tmp</code>	temporary files
<code>/usr</code>	progs/applications
<code>/var</code>	data files (logs, E-mail messages, status files)

Standard filesystem layout (cont)

<code>/usr</code>		
<code>/usr/bin</code>	binaries	
<code>/usr/lib</code>	libraries	
<code>/usr/libexec</code>	daemons	
<code>/usr/sbin</code>	sysadmin binaries	
<code>/usr/share</code>	documents	
<code>/usr/src</code>	source code	
<code>/usr/local/...</code>	3rd party applications	
<code>/usr/X11R6/...</code>	graphical applications	
<code>/var</code>		
<code>/var/log</code>	log files	
<code>/var/mail</code>	mailboxes	
<code>/var/run</code>	process status	
<code>/var/spool</code>	queue data files	
<code>/var/tmp</code>	temporary files	

Why like this?

- It's good practice to keep /usr and /var in separate filesystems in separate partitions
 - So if /var fills up, the rest of the system is unaffected
 - So if /usr or /var is corrupted, you can still boot up the system and repair it
- That's why we have a small number of essential tools in /bin, /sbin; the rest go in /usr/bin and /usr/sbin
- Third-party packages are separate again
 - /usr/local/bin, /usr/local/sbin, /usr/local/etc ...

A note about devices

- e.g. /dev/ad0 = the first ad (ATAPI/IDE disk)
- In FreeBSD, entries for each device under /dev are created dynamically
 - e.g. when you plug in a new USB device
- Some "devices" don't correspond to any hardware (pseudo-devices)
 - e.g. /dev/null is the "bit bucket"; send your data here for it to be thrown away

Any questions?

?

Some reminders about PC architecture

- When your computer turns on, it starts a bootup sequence in the BIOS
- The BIOS locates a suitable boot source (e.g. floppy, harddrive, CD-ROM, network)
- Disks are divided into 512-byte blocks
- The very first block is the MBR (Master Boot Record)
- The BIOS loads and runs the code in the MBR, which continues the bootup sequence

Partitioning

- The MBR contains a table allowing the disk to be divided into (up to) four partitions
- Beyond that, you can nominate one partition as an "extended partition" and then further subdivide it into "logical partitions"
- FreeBSD has its own partitioning system, because Unix predates the PC
- FreeBSD recognises MBR partitions, but calls them "slices" to avoid ambiguity

FreeBSD partitions

- Partitions (usually) sit within a slice
- Partitions called a,b,c,d,e,f,g,h
- CANNOT use 'c'
 - for historical reasons, partition 'c' refers to the entire slice
- By convention, 'a' is root partition and 'b' is swap partition
- 'swap' is optional, but used to extend capacity of your system RAM

Simple partitioning: /dev/ad0



'Auto' partition does this:

- Small root partition
 - this will contain everything not in another partition
 - /boot for kernel, /bin, /sbin etc.
- A *swap partition* for virtual memory
- Small /tmp partition
 - so users creating temporary files can't fill up your root partition
- Small /var partition
- Rest of disk is /usr
 - Home directories are /usr/home/<username>

Issues

- /var may not be big enough
- /usr contains the OS, 3rd party software, and your own important data
 - If you reinstall from scratch and erase /usr, you will lose your own data
- So you might want to split into /usr and /u
 - Suggest 4-6GB for /usr, remainder for /u
- Some people prefer a ramdisk for /tmp

```
md /tmp mfs -s131072,rw,nosuid,nodev,noatime 0 0
```

Core directory refresher

- / (/boot, /bin, /sbin, /etc, maybe /tmp)
- /var (Log files, spool, maybe user mail)
- /usr (Installed software and home dirs)
- Swap (Virtual memory)
- /tmp (May reside under "/)

Don't confuse the the "root account" (/root) with the "root" partition.

Note...

- Slicing/partition is just a logical division
- If your hard drive dies, most likely *everything* will be lost
- If you want data security, then you need to set up mirroring with a separate drive
 - Another reason to keep your data on a separate partition, e.g. /u
 - Remember, "x1m -x1" on a mirror works very well.

Summary: block devices

- IDE (ATAPI) disk drives
 - /dev/ad0
 - /dev/ad1 ...etc
- SCSI or SCSI-like disks (e.g. USB flash)
 - /dev/da0
 - /dev/da1 ...etc
- IDE (ATAPI) CD-ROM
 - /dev/acd0 ...etc
- Traditional floppy drive
 - /dev/fd0
- etc.

Summary

- Slices
 - /dev/ad0s1
 - /dev/ad0s2
 - /dev/ad0s3
 - /dev/ad0s4
- Defined in MBR
- What PC heads call "partitions"
- BSD Partitions
 - /dev/ad0s1a
 - /dev/ad0s1b
 - /dev/ad0s1d ...etc
 - /dev/ad0s2a
 - /dev/ad0s2b
 - /dev/ad0s2d ...etc
- Conventions:
 - 'a' is /
 - 'b' is swap
 - 'c' cannot be used

Any questions?

?

Installing FreeBSD

- Surprisingly straightforward
- Boot from CD or floppies, runs "sysinstall"
- Slice your disk
 - Can delete existing slice(s)
 - Create a FreeBSD slice
- Partition
- Choose which parts of FreeBSD distribution you want, or "all"
- Install from choice of media
 - CD-ROM, FTP, even a huge pile of floppies!

Finding more information

- Our reference handout
 - a roadmap!
- man pages
 - esp. when you know the name of the command
- www.freebsd.org
 - handbook, searchable website / mail archives
- "The Complete FreeBSD" (O'Reilly)
- comp.unix.shell FAQ
 - <http://www.fags.org/faqs/by-newsgroup/comp/comp.unix.shell.html>
- STFW (Search The Friendly Web)